



A.T.C. DIŐ TİCARET DANIŐMANLIK TURİZM MEDYA YAYINCILIK PRODÜKSİYON LIMITED ŐİRKETİ

P.K...: 103 Karşıyaka – İzmir -Türkiye

TEL...: +90 232 7001 532 & +90 850 441 0 177 & + 90 533 77 77 0 77 FAX...: + 90 232 7002 975 & +90 850 441 0 227

E-MAIL...: atc@atc.org.tr & africa@africatradecenter.net WEB...: <http://www.atc.org.tr> & <http://www.africatradecenter.net>

CONTAINERIZED BLAST FREEZER

Mobile Shock 40HP

CAPACITY TABLE (approx.)


Freezing Time (hour)	Freezing Caps. Kg.	Bin 40x60 cm. Qty. 11kg/each
6 Hours	1.450 kg.	132 pcs.
8 Hours	1.933 kg.	176 pcs.
12 Hours	2.900 kg.	264 pcs.
16 Hours	3.867 kg.	352 pcs.
20 Hours	4.833 kg.	439 pcs.
24 Hours	5.800 kg.	527 pcs.

BIN QTY. & DIMENSIONS

Case (bin) Dimensions	Loading Capacity First Floor (max.)	Loading Capacity Total (max.)
40x60x11 cm	44 pcs	616 pcs
Effective Loading Area	212cm x 930cm = 19,7m2	



COOLING CYCLE

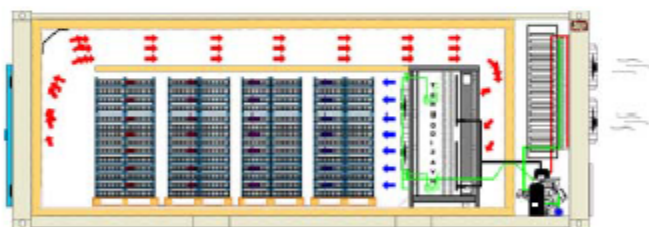

GENERAL VIEW



Unit Code	Mobile Shock 40HP
Cooling Capacity	29 kw.
Evaporation / Condensation	-40C / +40C
Refrigerant	R404a - R449a
Voltage	380V / 50Hz / 3Ph
Noise (within 6m)	85 dBA
Total Unit Weight	~ 7850 kg.
Suction Line	54 mm
Liquid Line	35 mm
Compressor	Semi Herm. Double Stage
Displacement	122,4 m3/h
Brand	Dorin
Power Input	25 kw.
Current	52 Amper
C.O.P.	1,15
Oil Charge	4,5 liter
Evaporator	
Real Capacity	30,6 kW
Surface	236,6 m2
Fans Qty x Diameter	4 x 630mm.
Fans Air Flow	11.000m3/h
Fans Total Air Flow/Pressure	44.000m3/h 330 Pascal
Defrosting	Electric Resistance
Fin Spacing	10 mm
Condenser	Air Cooled
Exchange Surface	261 m2
Fans Qty x Diameter	6 x 500mm.
Fans Total Air Flow	48.000m3/h
Electric Board	Included
Remote Control Panel	Eliwell Mycro Processor
Container	Special ISO
Door	100x180 Hinged
Sandwich Panels	Polyurethane - PVC+Poly
Floor Insulation	2mm Cr.Ni Covered Plywood

Dimensions :



Ürün Tanımı		Adet	Birim Fiyatı	Fiyat
Konteyner Tip Mobil MBF 40		1	€	€
Şoklama Üniteleri				
Sıcaklık Aralığı		+20/-40 °C	Ürün Giriş Sıcaklığı	+10 °C
Şoklama Miktarı (8h)		2000 kg/8h	Şoklama Miktarı (12h)	3000 kg/12h
Şoklama Miktarı (24h)		6000 kg/24h	Ürün Cinsi	Balık (orta boy)
Efektif Yükleme Alanı		214 x 840 cm	Soğutma Kapasitesi	29000 watt
Kompresör Tipi		Çift Kademeli Yarı Hermetik	Kompresör Gücü	40 HP
Kompresör Elektrik Gücü		25 kw/h	Kompresör Çektiği Akım	52 Amp
Kompresör Süpürme Hacmi		122,4 m3/h	Soğutucu Akışkan	R404a - R449a
Kapı Tipi		Menteşeli Pvc+Pvc	Kapı Geçiş Aralığı	110x180 cm
İzolasyon Malzemesi		Sandviç Panel	Panel Yüzeyleri	PVC
Zemin Yüzey Malzemesi		Plywood + 2mm Cr.Ni	Ölçüler (WxLxh)	2438x12192x2896 mm.
Şase Tipi		40ft HQ Konteyner	Ağırlık	6850 kg
Teslim Yeri		Ex Works (EXW) - İstanbul	Nakliye Sigortası	Alıcıya Ait
Nakliye		Hariç	Montaj	Yok
Ambalaj		Ambalajlı	İşletmeye Alma	Hariç
Ara Toplam K.D.V %20 Genel Toplam				€ 67,500.- C&F